

PRODUCTS & APPLICATION

FA series

[FA series \(/en.php/product/detail?id=50\)](#)

[F series \(/en.php/product/detail?id=51\)](#)

[K series \(/en.php/product/detail?id=52\)](#)

FA series

请您留言

SWT/FA series

SWT/FA series lock nut has four grooves along the circumference. Nuts with size of 15 and below have two planes directly opposite each other, and can be clamped by general wrench.. This design can meet requirements of high precision, easy installation and steady locking etc.

Material: 42CrMo,45#, 40Cr

Hardness: HRC28°—32°

Thread Precision: ISO4H

Run Out: 0.005mm


发送

Thread	d1	D	d	d2	h	g	t	M	MAX.Nm
SWT/FA M10x1.25	10	20	10	12	14	4	2.5	27	15

SWT/FA M12X1.0P	23	30	25	13	14	4	2.5	27	4.5
SWT/FA M15x1.0P	26	33	28	16	16	4	2.5	30	4.5
SWT/FA M17x1.0P	29	37	33	18	18	5	2.5	34	8.0
SWT/FA M20x1.0P	32	40	35	21	18	5	2.5	36	8.0
SWT/FA M25x1.5P	36	44	39	26	20	5	2.5	41	8.0
SWT/FA M30x1.5P	41	49	44	32	20	5	2.5	46	8.0
SWT/FA M35x1.5P	46	54	49	38	22	5	2.5	50	8.0
SWT/FA M40x1.5P	56	65	59	42	22	6	3	60	8.0
SWT/FA M45x1.5P	61	70	64	48	22	6	3	65	8.0
SWT/FA M50x1.5P	65	75	68	52	25	7	3.5	70	8.0
SWT/FA M55x2.0P	74	85	78	58	25	7	3.5	80	18.0
SWT/FA M60x2.0P	78	90	82	62	26	8	4	85	18.0
SWT/FA M65x2.0P	83	95	87	68	28	8	4	90	18.0
SWT/FA M70x2.0P	88	100	92	72	28	8	4	95	18.0
SWT/FA M75x2.0P	93	105	97	77	28	8	4	100	18.0
SWT/FA M80x2.0P	98	110	100	83	32	8	3.5	100	18.0
SWT/FA M85x2.0P	107	120	110	88	32	10	4	110	35.0
SWT/FA M90x2.0P	112	125	115	93	32	10	4	115	35.0
SWT/FA M95x2.0P	117	130	120	98	32	10	4	120	35.0
SWT/FA M100x2.0P	122	135	125	103	32	10	4	130	35.0
SWT/FA M110x2.0P	132	145	135	112	32	10	4	140	35.0
SWT/FA M120x2.0P	142	155	144	122	32	10	4	150	35.0
SWT/FA M130x2.0P	152	165	154	132	32	12	5	160	35.0
SWT/FA M140x2.0P	162	175	164	142	32	14	6	170	35.0
SWT/FA M150x2.0P	172	185	174	152	32	14	6	180	35.0
SWT/FA M160x2.0P	182	195	184	162	32	14	6	190	35.0
SWT/FA M170x2.0P	192	205	194	172	32	14	6	200	35.0
SWT/FA M180x2.0P	202	215	204	182	32	16	7	210	35.0
SWT/FA M190x2.0P	212	225	214	192	32	16	7	220	35.0
SWT/FA M200x2.0P	222	235	224	202	32	18	8	230	35.0

欢迎来到本网站，请问有什么可以帮您的？

稍后再说 现在咨询

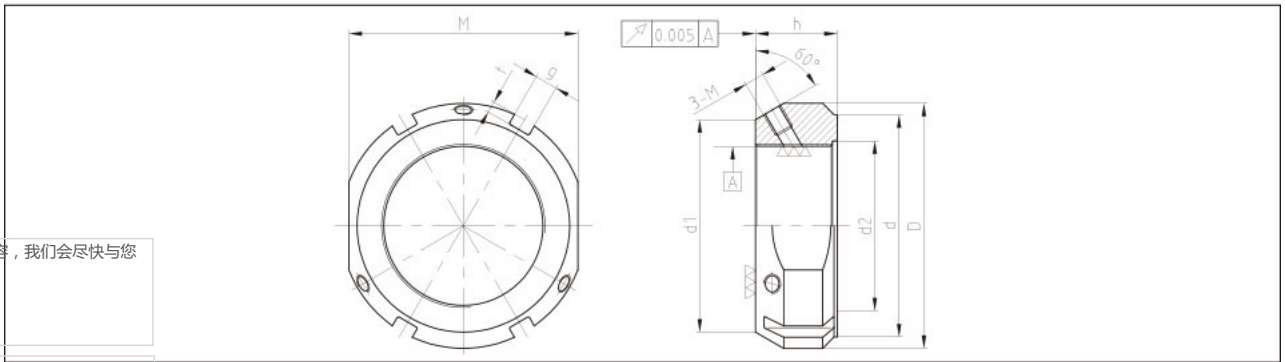

请在此输入留言内容，我们会尽快与您联系。（必填）

姓名

电话（必填）

请您留言

邮箱

Spindle 地址

Lock nut Bearing block Wedge block Rotary table Hydraulic lock nut Accessory

A Xuzhuang Park Road, Xingren Town, Tongzhou District, Nantong, Jiangsu, China
 T +86-513-86222888 F +86-513-85650761

9/23/2017

Product Line

Company Profile	Product Line	Solution	Careers
(/en.php/about/index)	(/en.php/product/cate?	(/en.php/tech/solution?	(/en.php/contact/job)
Company History	id=28)	type=1)	Location
(/en.php/about/history)	Application Fields	Technical Innovation	(/en.php/contact/index)
Honors and Rewards	(/en.php/product/app-list)	(/en.php/tech/innovation)	
(/en.php/about/honor)		FAQ	
Our Customer		(/en.php/tech/qanda)	

Copyright(C)2009-2017 Jiangsu Swift Machinery Technology Co., Ltd 苏ICP备17027845号-1 (<http://www.miitbeian.gov.cn/publish/query/indexFirst.action>)

DESIGN BY **HANSNBRAND** (<http://hansnbrand.com>)

请您留言

发送